




L-PUMPER

LPU-1

Removes debris from mouth of impellers without dis-assembling the pump.


- Just remove trap cover and basket
- Insert L-Pumper facing the impeller mouth.
- Pump handle up & down several times ending with an “up” stroke.
- Remove L-Pumper from trap.
- Rinse the L-Pumper starting with a “down” stroke to remove debris from the L-Pumper.



GRID WAND

GWD-1

- ✦ Thoroughly clean DE grids without disassembling
- ✦ Extends to 68 inches
- ✦ Saves Time
- ✦ Does a better job

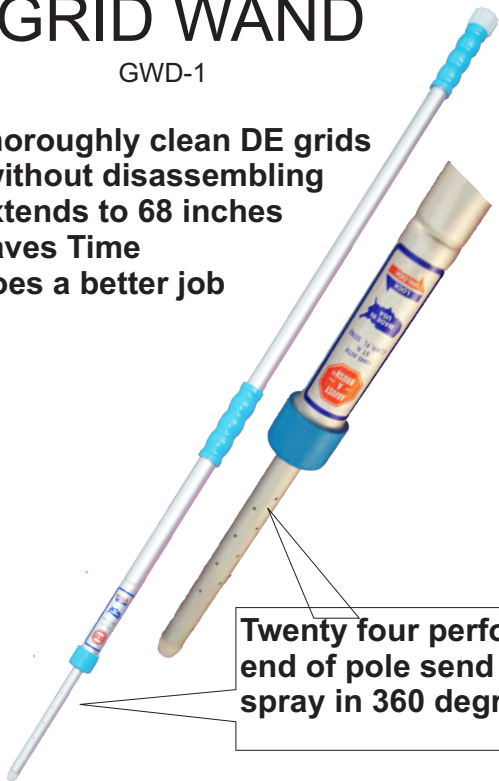

Twenty four perforations at end of pole send pressurized spray in 360 degree pattern.

4.5” TONGUE AND GROOVE PLIERS

TGP-4.5

- ◆ A welcome addition to every pool tech’s tool box
- ◆ Will become one of the most used tools in the box.
- ◆ Great for working in those tight places.
- ◆ Jaws adjust from 0 to 1/2 inch.
- ◆ Highest quality - manufactured by CHANNELLOCK Inc.



RETURN FITTING ESCUTCHEONS

RFE-1.5W, RFE-1.5B


- ◆ Trims out standard 1 1/2” eyeball.
- ◆ Available in white or black.



The SAND - VAC SYSTEM

SVS-1

Empties a sand filter in 15 minutes!

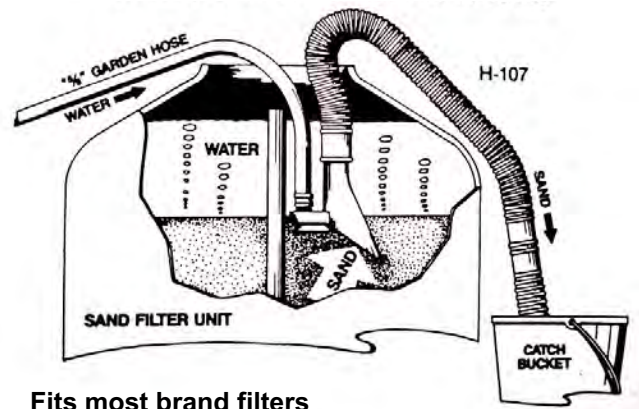

Fits most brand filters
 Pays for itself in labor savings.
 Makes emptying a sand filter both quick and easy

